

549,858

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number
WO 2004/085759 A1

(51) International Patent Classification⁷:
5/14, B29C 65/10

E04D 15/04,

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/SE2004/000460

(22) International Filing Date: 24 March 2004 (24.03.2004)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0300797-8

24 March 2003 (24.03.2003)

SE

(71) Applicant and

(72) Inventor: RANTZEN, Lennart [SE/SE]; Södra Ring-
gatan 43, S-441 33 Alingsås (SE).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(74) Agents: ROSENQUIST, Per, Olof et al.; Bergenstråhle &
Lindvall AB, P.O. Box 17704, S-118 93 Stockholm (SE).

Published:

— with international search report

[Continued on next page]

(54) Title: AN APARATUS FOR JOINING ROOF COVERING MATERIALS

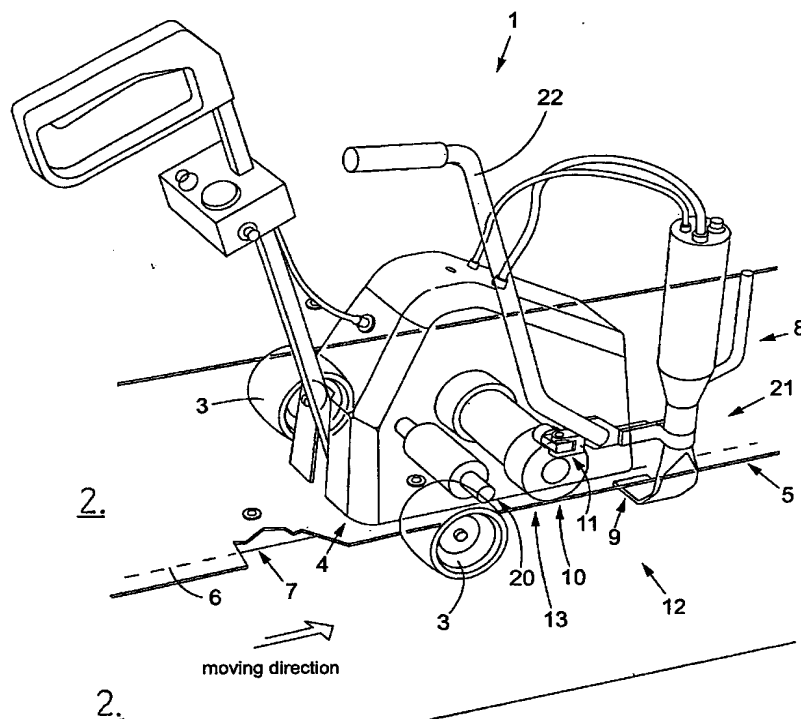

(57) Abstract: An arrangement for an apparatus (1) for application of roof covering (2) and comprising a wagon (4) moveable by aid of wheels (3) intended to join together two unrolled rolls of roof covering in connection to a joint (5) on top of each other lying covering layers (6, 7) by aid of a hot air aggregate (8) supported by said wagon (4), which via a nozzle (9) blows hot gas into said joint (5) at the same time as the wagon (4) is moved forwards and at least one operating pressure roller (10) included in said wagon (4), which is intended to press together the covering layers (6, 7) lying on top of each other. The hot air aggregate (8) is turnably supported onto the one front outer portion (12) of said wagon (4) by aid of a hinge (11) having its nozzle (9) turnable inwards between those covering layers (6, 7), which shall be welded together and said operating pressure roller (10) is provided in the front, central portion (13) of the wagon (4) immediately after the nozzle (9) on the same when it is in its turned in, active position and which comprises a middle portion (14) having a smaller diameter than adjacent outer portions (15, 16) for achieving two application surfaces (17, 18) against a joint surface (19) in the joint at the same time as an extra pressure roller (20) is provided after or

behind the operating pressure roller (10) intended only to act against that surface of the joint (5), which the first, operating pressure roller (10) has not treated.

WO 2004/085759 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.